



AITILED LLC POLO ROSAS PRESIDENT, FOUNDER: AITILED CORPORATION

World headquarters

rosaspolo@aol.com
twitter@rosaspolo
polorosas@aitiledcorp.com
www.aitiledcorp.com

2023 PRODUCT CATALOG

Disclaimer:

With the progress of technology, all product data in this document will change, the specific product data shall be subject to the product manual.

USA OFFICES

🏠 1283 E. Main street El Cajon California Suite 109 92021

☎ Office telephone : 714-203-5318

✉ rosaspolo@aol.com ; rosaspolo@icloud.com

🌐 <http://www.aitiledcorp.com>

CEO: Polo Rosas **VICE-PRESIDENT:** Christian Rosas

MEXICO OFFICES

🏠 AITI DE MEXICO S DE RL DE CV TRI-ALPHA INGENIERIA
Cocoteros 156 Col. Nueva Santa Maria Delegacion
Azcapotzalco C.P. 02800 Mexico City CDMX

☎ Office telephone : (55) 8589 9810 ; (55) 8589 9811

✉ hnoriegao@tri-alpha.mx

Director General: Ing. Hector Noriega Olivo

SALES REPRESENTATIVE FOR LATINO-AMERICA

APORTA INOVA SA DE CV

☎ Office telephone : (55) 3869-0139

✉ alcala@aportainova.com.mx

🌐 <http://www.aportainova.com.mx>

CEO: Angel Alcala





LED Area Post Top Light

Page 4



LED Highbay Light

Page 5



LED Street Light

Page 6



LED Solar Area Light

Page 7



LED Stadium Light

Page 8



LED Floodlight/ Tunnel Light

Page 9



LED Gas Station/ Canopy Light

Page 10



LED Wallpack Light

Page 11



LED Solar Street Light

Page 12



LED Corn Light/Garden Light

Page 13




LED Retrofit Kit

Page 13



LED Linear Highbay/ LED Tri-proof Light

Page 14



LED Growth Light

Page 15



LED Work Light/Temporary Working Light

Page 16



Adjustable power/color temperature all in one

Page 17



Specification :

Model/ Power	Size
BB-LD-30W-AR-B	Ø345x563mm
BB-LD-50W-AR-B	Ø345x563mm
BB-LD-75W-AR-B	Ø345x563mm
BB-LD-100W-AR-B	Ø345x563mm
BB-LD-150W-AR-B	Ø345x563mm



Specification :

Model/ Power	Size
BB-LD-30/50/75W	Ø345x563mm
BB-LD-75/100/120/150W	Ø345x563mm

Adjustable power,Adjustable color temperature all in one
3 gears adjustment: 3000K, 4000K, 5000K.



Specification :

Model/ Power	Size
BB-LD-50W-AR-B	Ø379x350mm
BB-LD-100W-AR-B	Ø379x350mm
BB-LD-150W-AR-B	Ø379x350mm
BB-LD-200W-AR-B	Ø379x350mm



Specification :

Model/ Power	Size
BB-LD-60W-AR-J	Ø360x504mm
BB-LD-100W-AR-J	Ø360x504mm
BB-LD-150W-AR-J	Ø360x504mm



Specification :

Model/ Power	Size
BB-LD-60W-AR-B2	Ø450x542mm
BB-LD-80W-AR-B2	Ø450x542mm
BB-LD-100W-AR-B2	Ø450x542mm
BB-LD-120W-AR-B2	Ø450x542mm



Specification :

Model/ Power	Size
BB-LD-30W-AR-E	Ø365x536mm
BB-LD-50W-AR-E	Ø365x536mm

IC type



Specification :

Model/ Power	Size
BB-LD-30W-AR-H	Ø450x524mm
BB-LD-40W-AR-H	Ø450x524mm
BB-LD-50W-AR-H	Ø450x524mm
BB-LD-60W-AR-H	Ø450x524mm
BB-LD-80W-AR-H	Ø450x524mm
BB-LD-100W-AR-H	Ø450x524mm
BB-LD-120W-AR-H	Ø450x524mm



Specification :

Model/ Power	Size
BB-LD-200W-AR-F	420*420*463mm
BB-LD-240W-AR-F	420*420*463mm
BB-LD-320W-AR-F	420*420*463mm



Specification :

Model/ Power	Size
BB-LD-100W-AR-I	Ø620x375mm
BB-LD-120W-AR-I	Ø620x375mm
BB-LD-150W-AR-I	Ø620x375mm






Specification :

Model/ Power	Size
BB-LD-30W-AR-B3	Ø400x700mm
BB-LD-50W-AR-B3	Ø400x700mm
BB-LD-75W-AR-B3	Ø400x700mm
BB-LD-100W-AR-B3	Ø400x700mm

Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design IP67 Rated enclosure
- Replacing 100W-1000W Metal Halide
- Optional with photocell
- 5 years warranty

Installation Method:

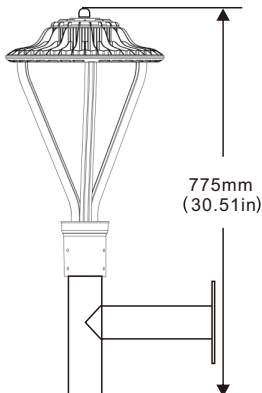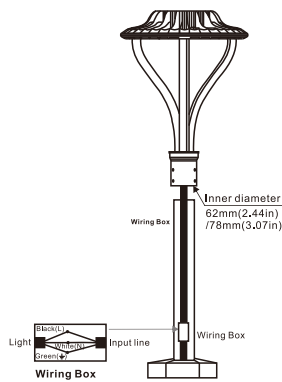

Application:

- Garden lighting.
- Community lighting.
- Campus lighting.
- Parking lot lighting.
- Street lighting.





Specification :

Model/ Power	Size
BB-GKD-60W-E	Ø230x111mm
BB-GKD-100W-E	Ø280x164mm
BB-GKD-150W-E	Ø338x167mm
BB-GKD-200W-E	Ø400x164mm
BB-GKD-240W-E	Ø400x172mm
BB-GKD-300W-E	Ø400x255mm



Specification :

Model/ Power	Size
BB-GKD-60/75/100/120W	Ø290x174mm
BB-GKD-75/100/120/150W	Ø340x181mm

Adjustable power/ color temperature all in one
3 gears adjustment: 3000K, 4000K, 5000K.



Specification :

Model/ Power	Size(Cover)
BB-GKD-60W-E	Ø310x187mm
BB-GKD-100W-E	Ø310x150mm
BB-GKD-150W-E	Ø310x105mm
BB-GKD-200W-E	Ø410x205mm
BB-GKD-240W-E	Ø410x205mm
BB-GKD-300W-E	Ø410x205mm
BB-GKD-400W-E	Ø575x205mm



Specification :

Model/ Power	Size
BB-GKD-100W-E4	Ø250x178mm
BB-GKD-150W-E4	Ø300x181mm
BB-GKD-200W-E4	Ø345x183mm



Specification :

Model/ Power	Size
BB-GKD-30W-E6-IC	Ø250x110mm
BB-GKD-50W-E6-IC	Ø250x110mm



Specification :

Model/ Power	Size
BB-GKD-100W-E3	Ø290x174mm
BB-GKD-150W-E3	Ø340x181mm
BB-GKD-200W-E3	Ø380x183mm




Specification :

Model/ Power	Size
BB-GKD-100W-E5-IC	Ø250x110mm
BB-GKD-150W-E5-IC	Ø300x130mm
BB-GKD-200W-E5-IC	Ø345x130mm

Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation. And lower maintenance
- Air cooling design IP65 Rated enclosure
- Replacing 100W-1000W Metal Halide
- Optional with photocell. Microwavew sensor
- 5 years warranty

Installation Method:

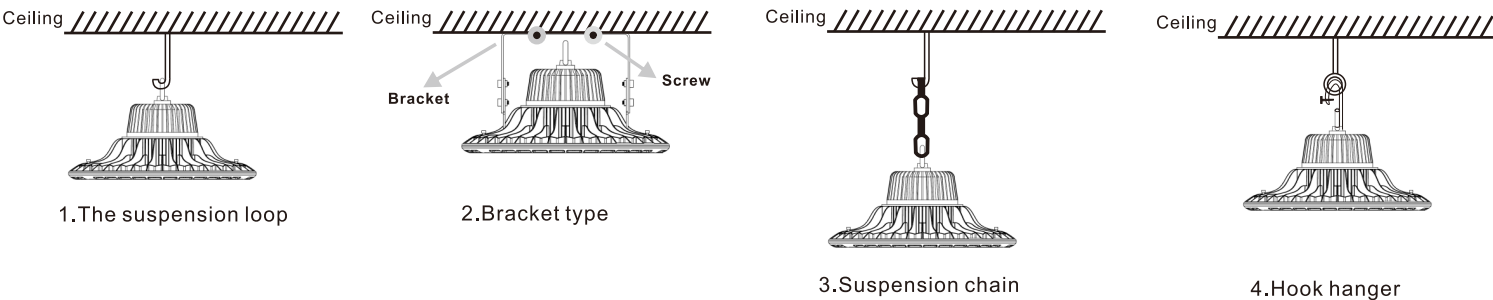


Application:


- Parking area lighting
- Warehouse lighting
- Factories lighting
- Workshop lighting
- Indoor stadium lighting



Warehouse lighting

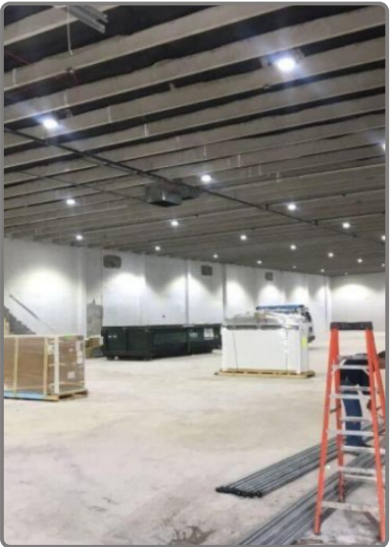

Factories lighting

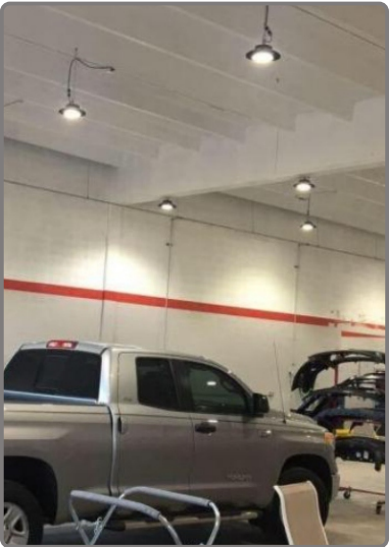

Garage lighting

Specification:

Model/ Power	Size
BB-LD-50W-S	616x250x72mm
BB-LD-100W-S	616x250x72mm
BB-LD-150W-S	616x250x72mm

Specification:

Model/ Power	Size
BB-LD-50/80/100/120W	616x250x72mm

Specification:

Model/ Power	Size
BB-LD-100W-S2	536x316x70mm
BB-LD-150W-S2	536x316x70mm
BB-LD-240W-S2	625x316x70mm
BB-LD-300W-S2	710x316x80mm

Specification:

Model/ Power	Size
BB-LD-50W-S4	568* 200* 109mm
BB-LD-100W-S4	613* 240* 109mm
BB-LD-150W-S4	680* 260* 109mm
BB-LD-200W-S4	693* 300* 109mm
BB-LD-300W-S4	793* 300* 109mm

Specification:

Model/ Power	Size
BB-LD-50W-S7	522*205*90mm
BB-LD-100W-S3	508*291*94mm
BB-LD-150W-S3	569*291*94mm
BB-LD-200W-S3	680*307*94mm
BB-LD-300W-S3	842*307*94mm

Specification:

Model/ Power	Size
BB-LD-50W-S5	460* 230* 180mm
BB-LD-100W-S5	585* 290* 185mm
BB-LD-150W-S5	645* 290* 185mm

Specification:

Model/ Power	Size
BB-LD-200W-S	616x420x80mm
BB-LD-240W-S	616x420x80mm
BB-LD-300W-S	616x420x80mm

Specification:

Model/ Power	Size
BB-LD-100/150/200/240W	616x250x72mm

Specification:

Model/ Power	Size
BB-LD-50W-S3	560* 200* 98mm
BB-LD-100W-S3	610* 245* 98mm
BB-LD-150W-S3	660* 245* 98mm
BB-LD-200W-S3	712* 300* 98mm
BB-LD-300W-S3	714* 340* 98mm

Specification:

Model/ Power	Size
BB-LD-50W-S6	463* 173* 87mm
BB-LD-100W-S6	611* 240* 89mm
BB-LD-150W-S6	680* 260* 89mm

Specification:

Model/ Power	Size
BB-LD-50W-S10	408* 230* 105mm
BB-LD-100W-S4	508* 230* 105mm
BB-LD-150W-S4	600* 257* 108mm

Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof.
- Stable and durable, easy installation and lower maintenance
- Air cooling design Ip67 Rated enclosure
- Replacing 100W-1000W Metal Halide
- Optional with photocell. Microwavew sensor
- 5 years warranty

Optional type:




Standard: no sensor Photocell sensor Microwave sensor Adjustable power and CCT (All in one)

Installation Method:



Slip Fiter Arm Mount Trunnion-A

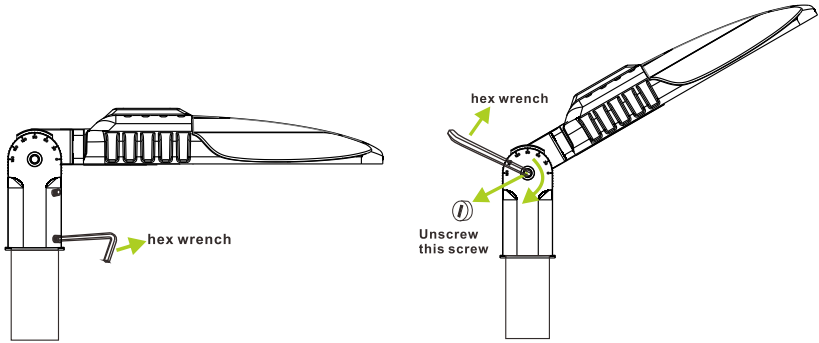

Application:

- Area lighting/Street lighting
- Industrial lighting
- Stadium lighting
- Port wharf lighting
- Roadway lighting



Street scapes lighting



Roadway lighting



Roadway lighting

LED Solar Area Lights



Specification :

Model/ Power	Size
BB-SLD-15W-AR-B	Ø405x535mm
BB-SLD-20W-AR-B	Ø405x535mm
BB-SLD-25W-AR-B	Ø540x529mm
BB-SLD-40W-AR-B	Ø540x529mm
BB-SLD-50W-AR-B	Ø850x529mm
BB-SLD-80W-AR-B	Ø850x529mm
BB-SLD-100W-AR-B	Ø850x529mm



Specification :

Model/ Power	Size
BB-SLD-15W-AR-C	410x365x41mm
BB-SLD-20W-AR-C	410x365x41mm
BB-SLD-25W-AR-C	410x365x41mm
BB-SLD-40W-AR-C	410x365x41mm
BB-SLD-50W-AR-C	680x510x41mm
BB-SLD-80W-AR-C	680x510x41mm
BB-SLD-100W-AR-C	680x510x41mm



Slant Design

Specification :

Model/ Power	Size
BB-SLD-15W-AR-BS	Ø405x582mm
BB-SLD-20W-AR-BS	Ø405x582mm
BB-SLD-25W-AR-BS	Ø540x571mm
BB-SLD-40W-AR-BS	Ø540x571mm
BB-SLD-50W-AR-BS	Ø850x680mm
BB-SLD-80W-AR-BS	Ø850x680mm
BB-SLD-100W-AR-BS	Ø850x680mm



Slant Design

Specification :

Model/ Power	Size
BB-SLD-15W-AR-CS	393x365x538mm
BB-SLD-20W-AR-CS	393x365x538mm
BB-SLD-25W-AR-CS	393x365x538mm
BB-SLD-40W-AR-CS	393x365x538mm
BB-SLD-50W-AR-CS	510x647x618mm
BB-SLD-80W-AR-CS	510x647x618mm
BB-SLD-100W-AR-CS	510x647x618mm



Specification :

Model/ Power	Size
BB-SLD-5W-AR-B4	Ø250x495mm
BB-SLD-10W-AR-B4	Ø250x495mm



Specification :

Model/ Power	Size
BB-SLD-5W-AR-B4	Ø250x384mm
BB-SLD-10W-AR-B4	Ø250x384mm



Specification :

Model/ Power	Size
BB-SLD-5W-AR-B4	Ø250x743~984mm
BB-SLD-10W-AR-B4	Ø250x743~984mm

Application:

- Area lighting/Street lighting
- Industrial lighting
- Stadium lighting
- Port wharf lighting
- Roadway lighting
- Airports lighting.




LED Solar Street Light



Specification :

Model/ Power	Size
BB-SLD-50W-A2	615*365*160mm
BB-SLD-80W-A2	720*365*160mm
BB-SLD-100W-A2	930*365*160mm



Specification :

Model/ Power	Size
BB-SLD-100W-A3	887*400*280mm
BB-SLD-150W-A3	1160*400*280mm
BB-SLD-200W-A3	1435*400*280mm



Specification :

Model/ Power	Size
BB-LD-ST-10W	460*225*50mm
BB-LD-ST-15W	460*225*50mm
BB-LD-ST-20W	670*320*50mm
BB-LD-ST-30W	670*320*50mm
BB-LD-ST-40W	840*370*50mm
BB-LD-ST-50W	1030*370*44mm
BB-LD-ST-80W	1140*425*44mm
BB-LD-ST-100W	1400*540*44mm
BB-LD-ST-120W	1400*540*44mm



Specification :

Model/ Power	Size
BB-SLD-100W-A3	887*400*280mm
BB-SLD-150W-A3	1160*400*280mm
BB-SLD-200W-A3	1435*400*280mm

Key Features:

- The company's patented product adopts the integrated design of A-type Sanyuanli battery pack and lamp body controller.
- Fully automatic intelligent light control, time control, remote control function, charging during the day and automatically lighting at night.
- It adopts one-piece aluminum casing, imported high-efficiency light source, full power solar panel, anti-corrosion, waterproof and lightning protection.
- This product is specially designed for outdoor outdoor lighting, easy to install.Solar power supply, 0 wiring, nail wall, pole, holding cement column and other installation methods.
- Suitable for highways, town roads, street lights, rural roads, park lights, courtyard lighting, channel lighting, farms, etc.
- This product solar panel energy efficiency conversion rate of 18% or more, normal sunshine charging more than 8 hours, can supply 3-4 rainy days.Evening (12 hours per night). High temperature resistance 80 degrees, low temperature resistance minus 20 degrees.

Application:





Specification :

Model/ Power	Size
BB-LD-300W-Q1	463*400*220mm
BB-LD-400W-Q1	530*480*352mm
BB-LD-500W-Q1	652*562*352mm
BB-LD-600W-Q1	652*562*352mm
BB-LD-800W-Q1	786*640*390mm
BB-LD-1000W-Q1	786*640*390mm



Specification :

Model/ Power	Size
BB-LD-450W-Q2-A	563x335x313mm
BB-LD-900W-Q2-A	665x494x603mm
BB-LD-1350W-Q2-A	665x733x885 mm
BB-LD-1800W-Q2-A	1166x494x603mm



Specification :

Model/ Power	Size
BB-LD-480W-Q	696x414x658mm
BB-LD-720W-Q	603x414x850mm
BB-LD-960W-Q	696x414x850mm
BB-LD-1200W-Q	949x414x580mm



Specification :

Model/ Power	Size
BB-LD-480W-Q	696x414x658mm
BB-LD-720W-Q	603x414x850mm
BB-LD-960W-Q	696x414x850mm
BB-LD-1200W-Q	949x414x580mm



Specification :

Model/ Power	Size
BB-LD-200W-Q3	L436*W323*H111
BB-LD-300W-Q3	L436*W418*H111
BB-LD-400W-Q3	L436*W525*H111
BB-LD-600W-Q3	L436*W747*H111
BB-LD-800W-Q3	L850*W580*H188
BB-LD-1200W-Q3	L809*W799*H144



Specification :

Model/ Power	Size
BB-LD-300W-Q4	L446*W321*H483
BB-LD-600W-Q4	L537*W373*H581




Specification :

Model/ Power	Size
BB-LD-500W-Q6	L598*W416*H290
BB-LD-1000W-Q6	L770*W549*H376

Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design,IP66 Rated enclosure
- Replacing 1500W-6000W Metal Halide
- Beam Angle is complete which can meet all Angle requirements
- Thermal Control Technology. Using advanced finite element analysis technology to optimize product heat dissipation structure design
- 5 years warranty

Installation Method:

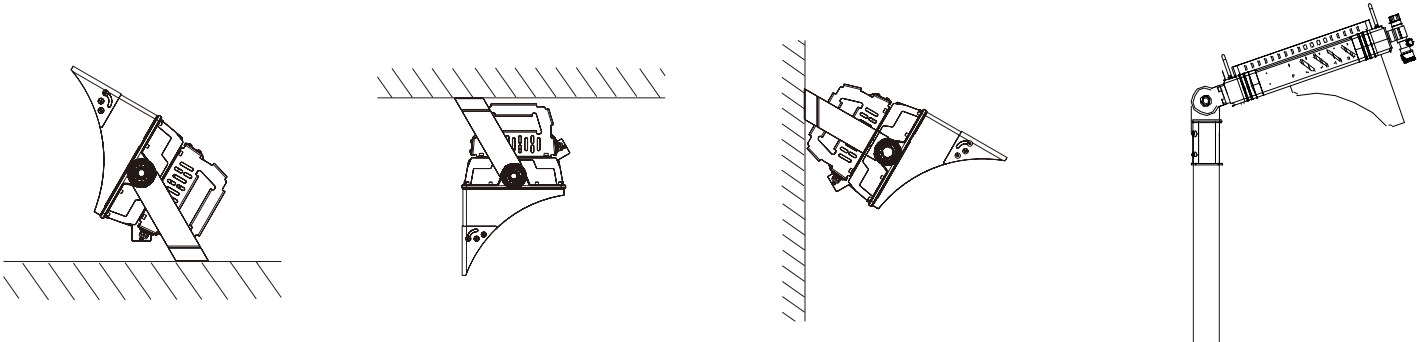

Application:

- Outdoor stadium
- Indoor stadium
- Golf course
- Football field
- Rugby field
- Outdoor/Indoor basketball court





Specification :

Model/ Power	Size
BB-LD-50W-S	547*250*74mm
BB-LD-100W-S	547*250*74mm
BB-LD-150W-S	547*250*74mm
BB-LD-200W-S	547*250*74mm
BB-LD-240W-S	547*420*80mm
BB-LD-300W-S	547*420*80mm



Specification :

Model/ Power	Size
BB-FL-10W-E	166*107*32mm
BB-FL-20W-E	216*152*40mm
BB-FL-30W-E	226*167*40mm
BB-FL-50W-E	310*220*50mm
BB-FL-80W-E	345*245*55mm
BB-FL-100W-E	402*345*60mm
BB-FL-150W-E	430*365*60mm
BB-FL-200W-E	470*360*60mm
BB-FL-300W-E	565*475*65mm
BB-FL-450W-E	585*559*70mm



Specification :

Model/ Power	Size
BB-LD-100W-S1	426*378*105mm
BB-LD-150W-S1	426*378*105mm
BB-LD-200W-S1	546*378*105mm
BB-LD-300W-S1	670*378*105mm



Specification :

Model/ Power	Size
BB-LD-60W-FL-D	322*229*73mm
BB-LD-80W-FL-D	322*387*73mm

BB-LD-50W-S



Specification :

Model/ Power	Size
BB-MBD-50W-A1	95*315*130mm
BB-MBD-100W-A1	190*315*130mm
BB-MBD-150W-A1	285*315*130mm
BB-MBD-200W-A1	370*315*130mm
BB-MBD-250W-A1	455*285*130mm
BB-MBD-300W-A1	272*570*130mm
BB-MBD-400W-A1	370*570*130mm
BB-MBD-500W-A1	470*570*130mm
BB-MBD-600W-A1	570*570*130mm
BB-MBD-800W-A1	740*570*130mm
BB-MBD-900W-A1	848*570*130mm
BB-MBD-1000W-A1	584*607*130mm
BB-MBD-1250W-A1	716*607*130mm
BB-MBD-1500W-A1	848*607*130mm





Specification :

Model/ Power	Size
BB-MBD-250W-Q4	590*190*200mm
BB-MBD-500W-Q4	630*240*280mm
BB-MBD-750W-Q4	630*240*435mm
BB-MBD-1000W-Q4	630*240*590mm
BB-MBD-1250W-Q4	630*240*745mm
BB-MBD-1500W-Q4	630*240*900mm

Key Features:


- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design Ip66 Rated enclosure
- Replacing 30W-6000W Metal Halide
- Beam Angle is complete which can meet all Angle requirements
- Replace conventional Flood Lights
- 5 years warranty

Installation Method:

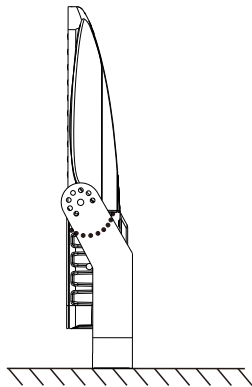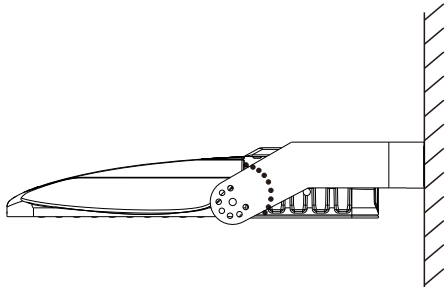

Application:


- Outdoor stadium
 - Indoor stadium
 - Golf course
- Football field
 - Rugby field
 - Tunnel Lighting

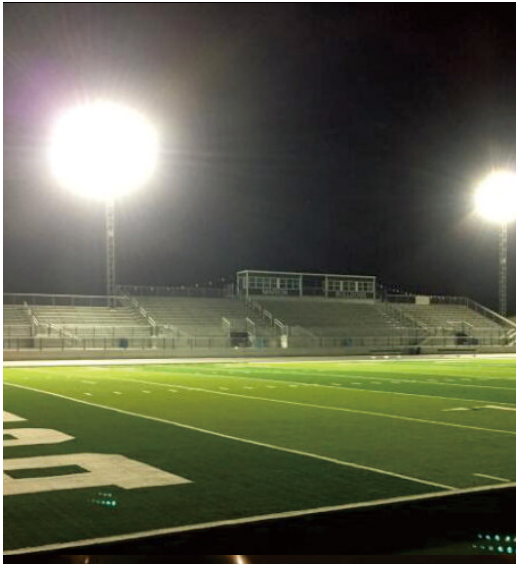




Specification :

Model/ Power	Size
BB-CSD-60W-C1	420*420*67mm
BB-CSD-100W-C1	420*420*67mm
BB-CSD-150W-C1	420*420*67mm
BB-CSD-200W-C1	540*540*67mm
BB-CSD-240W-C1	540*540*67mm
BB-CSD-300W-C1	540*540*67mm



Specification :

Model/ Power	Size
BB-CSD-100W-G2	550*550*30mm
BB-CSD-150W-G2	550*550*30mm
BB-CSD-200W-G2	550*550*30mm



Specification :

Model/ Power	Size
BB-CSD-40W-G4	280*280*40mm
BB-CSD-60W-G4	280*280*40mm
BB-CSD-80W-G4	280*280*40mm
BB-CSD-100W-G4	382*382*49mm
BB-CSD-120W-G4	382*382*49mm
BB-CSD-150W-G4	382*382*49mm



Specification :

Model/ Power	Size
BB-CSD-50W-M	420x240x82mm
BB-CSD-100W-M	420x320x82mm
BB-CSD-150W-M	
BB-CSD-200W-M	480x500x82mm
BB-CSD-250W-M	562x600x82mm



Specification :

Model/ Power	Size
BB-CSD-200W-G3	480x480x235mm



Specification :

Model/ Power	Size
BB-CSD-50W-H	245x245x85mm
BB-CSD-75W-H	245x245x85mm
BB-CSD-100W-H	314x314x95mm
BB-CSD-120W-H	314x314x95mm



Specification :

Model/ Power	Size
BB-CSD-20/30/40/60W	262x262x73mm
BB-CSD-60/80/100/120W	352x352x82mm



Specification :

Model/ Power	Size
BB-CSD-40/60/80/100W	Ø308x72mm

Adjustable power,Adjustable color temperature all in one
3 gears adjustment: 3000K, 4000K, 5000K.

Adjustable power,Adjustable color temperature all in one
3 gears adjustment: 3000K, 4000K, 5000K.



Specification :

Model/ Power	Size
BB-CSD-150W	415x405x141mm
BB-CSD-200W	415x405x141mm



Specification :


Model/ Power	Size
BB-CSD-80/100/120/150W	420x420x67mm
BB-CSD-120/160/200/240W	540x540x67mm

Adjustable power,Adjustable color temperature all in one
3 gears adjustment: 3000K, 4000K, 5000K.


Key Features:

- High performance LED fixture 130lm/W
- Imported original CREE XTE or Lumileds 3030 LED Chip
- Variety of mounting options
- The surface of lamp housing is anti-corrosion and electrophoresis processed.
- Dust-proof,moisture proof and waterproof ,IP65 rated
- Excellent optics design,higher luminous efficiency. uniform light spot, high efficiency, low glare
- Compare to traditional lamps can save energy 70%-80%
- Easy & quick Installation


Installation Method:

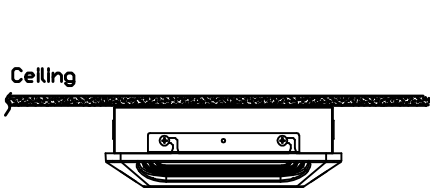

ATYLE 1:Ceiling installation

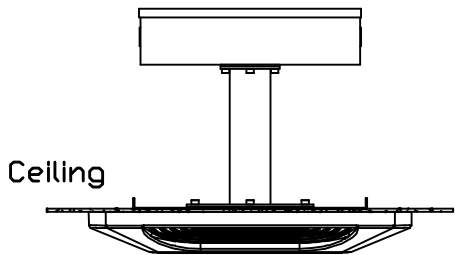

ATYLE 2:American installation



ATYLE 3:Embedded installation

Application:

- Gas station lighting.
- Petroleum canopies lighting.
- CNG fueling stations lighting.
- Low-medium bay general lighting.
- Soffits lighting.
- Garage lighting.



LED Wallpack Light



Specification:

Model/ Power	Size
BB-RSD-45W-B	363x234x196mm
BB-RSD-60W-B	363x234x196mm
BB-RSD-80W-B	363x234x196mm
BB-RSD-100W-B	363x234x196mm
BB-RSD-120W-B	363x234x196mm
BB-RSD-140W-B	363x234x196mm



Specification:

Model/ Power	Size
BB-RSD-35W-B2	320x132x115mm
BB-RSD-55W-B2	320x132x115mm
BB-RSD-80W-B2	320x132x115mm
BB-RSD-100W-B	320x132x115mm



Specification:

Model/ Power	Size
BB-RSD-75/100/120W	320x132x115mm



Specification:

Model/ Power	Size
BB-RSD-60W-C	322x265x241mm
BB-RSD-100W-C	322x265x241mm

Adjustable power,Adjustable color temperature all in one
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:

Model/ Power	Size
BB-RSD-30W-C1	201x167x90mm
BB-RSD-70W-C1	285x240x160mm
BB-RSD-100W-C1	285x240x160mm




Specification:

Model/ Power	Size
BB-RSD-2*3W-C3	65*160mm
BB-RSD-2*5W-C3	90*260mm
BB-RSD-2*10W-C3	110*300mm
BB-RSD-2*15W-C3	145*300mm
BB-RSD-2*18W-C3	145*300mm
BB-RSD-2*20W-C3	160*300mm



Specification:

Model/ Power	Size
BB-RSD-40W-B3	290x176x130mm
BB-RSD-60W-B3	290x176x130mm







Specification:

Model/ Power	Size
BB-RSD-45W-B4	333x159x250mm
BB-RSD-60W-B4	333x159x250mm
BB-RSD-80W-B4	333x159x250mm
BB-RSD-100W-B4	333x159x250mm
BB-RSD-120W-B4	333x159x250mm
BB-RSD-140W-B4	333x159x250mm

Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design Ip66 Rated enclosure
- Replacing 30W-300W Metal Halide
- ETL CETL CE ROHSlisted
- 5 years warranty

Installation Method:



Application:

- Parking lot Lighting.
- Garden yard Lighting.
- Outdoor Building Lighting.
- High/Low Bay Lighting.
- Building facades lighting.
- Sidewalks lighting.





Specification :



Model/ Power	Size
BB-SLD-50W-A2	615*365*160mm
BB-SLD-80W-A2	720*365*160mm
BB-SLD-100W-A2	930*365*160mm



Specification :



Model/ Power	Size
BB-SLD-100W-A3	887*400*280mm
BB-SLD-150W-A3	1160*400*280mm
BB-SLD-200W-A3	1435*400*280mm



Specification :



Model/ Power	Size
BB-SLD-40W-A4	760*430*150mm
BB-SLD-50W-A4	910*430*150mm
BB-SLD-60W-A4	1160*430*150mm



Specification :



Model/ Power	Size
BB-SLD-20W-A6	800*416*153mm
BB-SLD-30W-A6	800*416*153mm
BB-SLD-40W-A6	800*416*153mm



Specification :




Model/ Power	Size
BB-SLD-80W-G2	513*302*50mm
BB-SLD-100W-G2	730*320*50mm


Key Features:

- Fully automatic intelligent light control, time control, remote control function, charging during the day and automatically.
- It adopts one-piece aluminum casing, imported high-efficiency light source, full power solar panel, anti-corrosion, waterproof and lightning protection.
- This product is specially designed for outdoor outdoor lighting, easy to install. Solar power supply, 0 wiring, nail wall, pole, holding cement column and other installation methods.
- Suitable for highways, town roads, street lights, rural roads, park lights, courtyard lighting, channel lighting, farms, etc.
- 5 years warranty.

Installation Method:

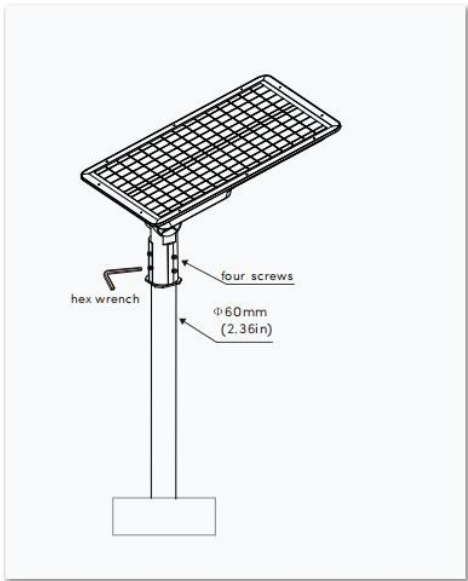

1.Round pole Mounting

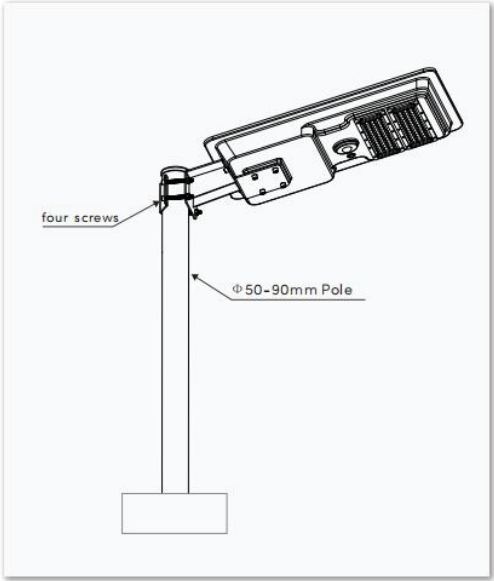

2.Bracket Mounting

Application:

- Parking lot Lighting.
- Street lighting
- Courtyard lighting
- Campus lighting
- Stadium lighting
- Park lighting



LED Corn Light/Garden Light



Specification :



Model/ Power	Size
BB-HJD-20W-P	Ø100*215mm
BB-HJD-30W-P	Ø100*215mm
BB-HJD-40W-P	Ø100*215mm
BB-HJD-50W-P	Ø100*250mm
BB-HJD-60W-P	Ø100*250mm
BB-HJD-80W-P	Ø128*271mm
BB-HJD-100W-P	Ø128*301mm
BB-HJD-120W-P	Ø128*331mm
BB-HJD-150W-P	Ø128*331mm



Specification :



Model/ Power	Size
BB-HJD-6W-P	Ø130*45mm
BB-HJD-8W-P	Ø136*45mm
BB-HJD-10W-P	Ø145*45mm
BB-HJD-12W-P	Ø165*45mm
BB-HJD-15W-P	Ø175*45mm



Specification :



Model/ Power	Size
BB-HJD-30W-D	Ø128*183mm
BB-HJD-40W-D	Ø128*183mm
BB-HJD-50W-D	Ø128*183mm
BB-HJD-60W-D	Ø128*183mm
BB-HJD-80W-D	Ø128*183mm



Specification :



Model/ Power	Size
BB-XHJD-30W-D	Ø150*185mm
BB-XHJD-40W-D	Ø150*185mm
BB-XHJD-50W-D	Ø150*185mm
BB-XHJD-60W-D	Ø150*185mm
BB-XHJD-80W-D	Ø150*185mm



Specification :



Model/ Power	Size
BB-HJD-30W-F	Ø88*265mm
BB-HJD-40W-F	Ø88*265mm
BB-HJD-50W-F	Ø88*265mm

LED Retrofit Kit



Specification :



Model/ Power	Size
BB-LD-SDD-60W	270*145mm
BB-LD-SDD-80W	270*145mm
BB-LD-SDD-100W	270*190mm
BB-LD-SDD-120W	270*190mm
BB-LD-SDD-150W	270*190mm
BB-LD-SDD-240W	450*330mm
BB-LD-SDD-300W	450*330mm



Specification :



Model/ Power	Size
BB-YPD-60W	Ø300*330mm
BB-YPD-80W	Ø300*330mm
BB-YPD-100W	Ø300*330mm
BB-YPD-120W	Ø300*350mm
BB-YPD-150W	Ø300*350mm
BB-YPD-370W	Ø365*340mm
BB-YPD-480W	Ø300*340mm



Specification :




Model/ Power	Size
BB-SDD-60/80/100120W	270*190mm

Adjustable power,Adjustable color temperature all in one
3 gears adjustment: 3000K, 4000K, 5000K.


Key Features:

- High performance LED fixture 130lm/W
- MH/HPS/HID/MHL/CFL lamp retrofit
- Screw Base Direct Install by bypass ballast
- 100% Die Casting Heat Sink
- Universal Base E26/E27E39/E40/EX39
- ETL CETL CE ROHS listed
- Stable and durable, easy installment and maintenance

Installation Method:

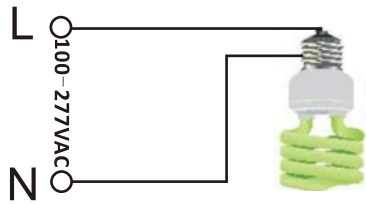


E39/E40/Ex39 CFL

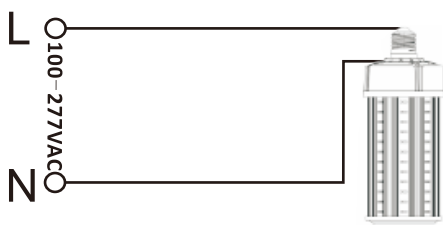

E39/E40/Ex39 LED Lamp

Application:

- Sports Light/Post Top Light.
- Flood Light/Pole Light.
- High/Low Bay Light
- Roadway Light/Street Light/Billboard Light.
- Other applicationroadway.

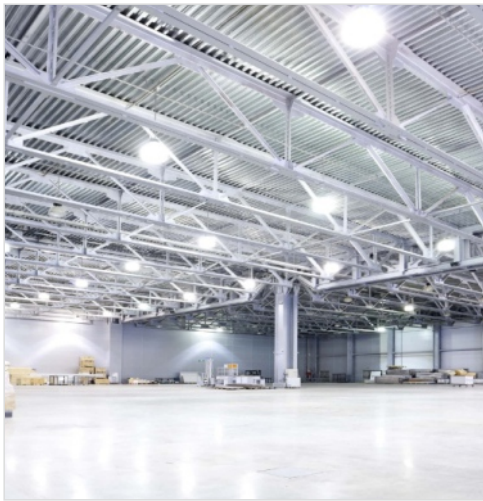

LED Linear Highbay/Tri-proof Light



Specification :



Model/ Power	Size
BB-GKD-A2-2FT-100W	608*158*74mm
BB-GKD-A2-2FT-150W	608*158*74mm
BB-GKD-A2-2FT-200W	608*400*68mm
BB-GKD-A2-4FT-240W	1216*400*68mm
BB-GKD-A2-4FT-320W	1216*400*68mm

Specification :



Model/ Power	Size
BB-GKD-60W-2/4FT	2FT/:590x293mm
BB-GKD-100W-2/4FT	4FT/:1173x293mm
BB-GKD-150W-2/4FT	
BB-GKD-200W-2/4FT	
BB-GKD-240W-2/4FT	
BB-GKD-300W-2/4FT	

Specification :



Model/ Power	Size
BB-RTGD-25W-A-22-D	603*603*45mm
BB-RTGD-40W-A-22-D	603*603*45mm

Specification :



Model/ Power	Size
BB-RTGD35W-A-24-D	1213*603*45mm
BB-RTGD-50W-A-24-D	1213*603*45mm



Specification :



Model/ Power	Size
BB-GKD-60W-2/4FT-AG	2FT/:590x293mm
BB-GKD-100W-2/4FT-AG	4FT/:1173x293mm
BB-GKD-150W-2/4FT-AG	
BB-GKD-200W-2/4FT-AG	
BB-GKD-240W-2/4FT-AG	
BB-GKD-300W-2/4FT-AG	



Troffer 1' x4'

Specification :



Model/ Power	Size
BB-RTGD-25W-A-14-D	1213*303*50mm
BB-RTGD-40W-A-14-D	1213*303*50mm



Specification :



Model/ Power	Size
BB-RTGD-XFT-20W	600*83*48mm
BB-RTGD-XFT-30W	900*83*48mm
BB-RTGD-XFT-40W	1200*83*48mm
BB-RTGD-XFT-50W	1200*83*48mm
BB-RTGD-XFT-60W	1500*83*48mm



Specification :



Model/ Power	Size
BB-GKD-60W-2/4FT	2FT/:590x293mm
BB-GKD-100W-2/4FT	4FT/:1173x293mm
BB-GKD-150W-2/4FT	
BB-GKD-200W-2/4FT	
BB-GKD-240W-2/4FT	
BB-GKD-300W-2/4FT	

Specification :



Model/ Power	Size
BB-RTGD-25W-A-22-D	603*603*45mm
BB-RTGD-40W-A-22-D	603*603*45mm

Specification :



Model/ Power	Size
BB-RTGD35W-A-24-D	1213*603*45mm
BB-RTGD-50W-A-24-D	1213*603*45mm



Troffer 2' x2'



Troffer 2' x4'

Key Features:

- High performance LED fixture 130lm/W
- Replace conventional Linear Highbay Lights
- Precision Die Cast Aluminum Housing
- Fade Resistant Powder Coat Finish
- Stable and durable, easy installation and lower maintenance

Installation Method:

• Suspension chain mounting





• Ceiling installation



Application:

- Parking areas lighting.
- Warehouse Lighting.
- Industrial workshop lighting.
- Stadium Lighting.
- Airport Lighting.
- Office lighting.

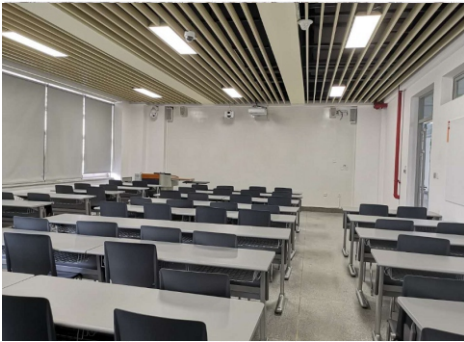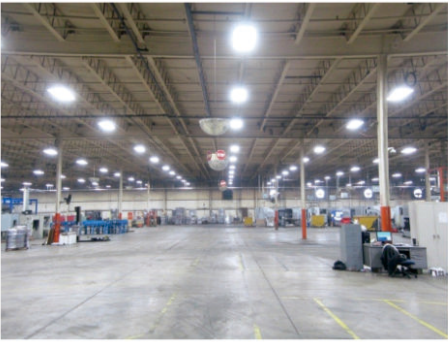



Specification :

Model/ Power	Size
BB-GKD-400W-G3-D2	L1004*W567*H46mm
BB-GKD-500W-G3-D2	L1004*W720*H46mm
BB-GKD-600W-G3-D2	L1004*W1121*H46mm
BB-GKD-800W-G3-D2	L1004*W1121*H46mm
BB-GKD-1000W-G3-D2	L1004*W1680*H46mm
BB-GKD-1200W-G3-D2	L1004*W1680*H46mm
BB-GKD-1500W-G3-D2	L1004*W2210*H46mm
BB-GKD-1600W-G3-D2	L1004*W2210*H46mm



Specification :

Model/ Power	Size
BB-GKD-300W-G3-D2	L576*W550*H31mm
BB-GKD-400W-G3-D2	L730*W806*H31mm
BB-GKD-480W-G3-D2	L730*W806*H31mm



Specification :

Model/ Power	Size
BB-GKD-600W-G3-D3	L689*W1128*H34mm
BB-GKD-640W-G3-D3	L689*W1128*H34mm
BB-GKD-720W-G3-D3	L1104*W1128*H34mm
BB-GKD-800W-G3-D3	L1104*W1128*H34mm
BB-GKD-1000W-G3-D3	L1104*W1128*H34mm




Specification :

Model/ Power	Size
BB-GKD-300W-G3-D1	L1004*W560*H46mm
BB-GKD-400W-G3-D1	L1004*W560*H46mm
BB-GKD-500W-G3-D1	L1004*W840*H46mm
BB-GKD-600W-G3-D1	L1004*W840*H46mm



Specification :

Model/ Power	Size
BB-GKD-400W-G3-D4	L608*W903*H101mm
BB-GKD-600W-G3-D4	L918*W903*H101mm
BB-GKD-800W-G3-D4	L1049*W903*H101mm
BB-GKD-1000W-G3-D4	L1149*W903*H101mm
BB-GKD-1200W-G3-D4	L1189*W903*H101mm
BB-GKD-1500W-G3-D4	L1749*W903*H101mm
BB-GKD-1600W-G3-D4	L1869*W903*H101mm




Specification :

Model/ Power	Size
BB-GKD-100W-G1	L300*W240*H54mm
BB-GKD-200W-G1	L600*W240*H54mm
BB-GKD-400W-G1	L600*W480*H54mm
BB-GKD-600W-G1	L720*W600*H54mm



Specification :

Model/ Power	Size
BB-GKD-100W-G2	L908*W63*63mm
BB-GKD-200W-G2	L908*W198*103mm
BB-GKD-300W-G2	L908*W338*113mm



Specification :

Model/ Power	Size
BB-GKD-640W-G4	L1060*W120*260mm



Specification :

Model/ Power	Size
BB-GKD-100W-E6	Ø280x164mm
BB-GKD-150W-E6	Ø338x167mm
BB-GKD-200W-E6	Ø400x164mm
BB-GKD-240W-E6	Ø400x172mm
BB-GKD-300W-E6	Ø400x255mm



Specification :

Model/ Power	Size
BB-GKD-800W-G5	722x315x112mm

Key Features:

- Full spectrum light output

Samsung LED chips

Ip65 waterproof,Use in moist environment

Includes remote dimmer

0/1-100% knob dimmer

Added red light for enhanced flowering

UL listed power supply(IP 67)
- Aluminum alloy with white/black coat

Energy efficient,low heat output

No fans or moving parts,silent running


Excellent heat dissipation

Easy Installation

Control multiple units with iLink technology

Lightweight slimline design

Installation Method:

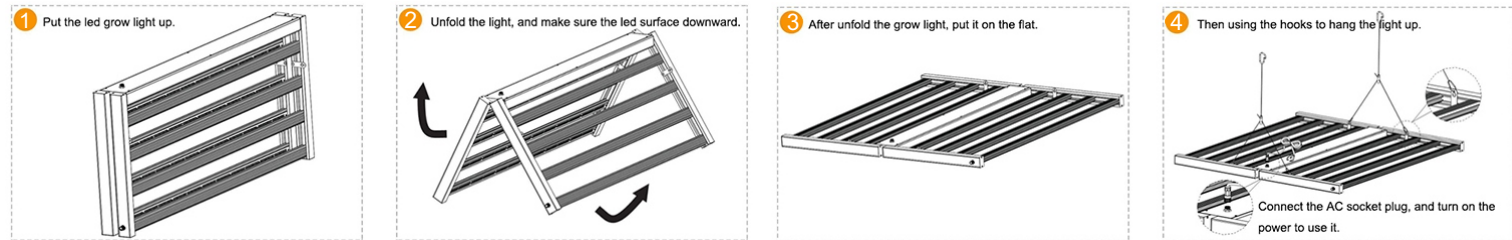

Application:

- Grow tent

Greenhouse

Horticulture lighting

Hydroponic cultivation
- Industry hempgrowth

Marijuana Cannabis lighting

Indoor planting growth


Farming plants research






Specification :

Model/ Power	Size
BB-MTD-30W	L1202*H339
BB-MTD-50W	L1202*H339

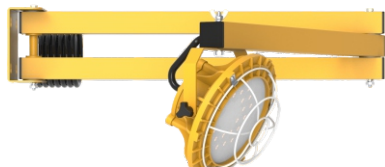

Specification :

Model/ Power	Size
BB-MTD-30W	L1266*H335
BB-MTD-50W	L1266*H335

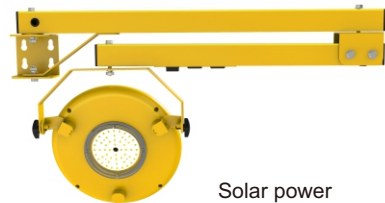

Specification :

Model/ Power	Size
BB-MTD-5W-AR	L1202*H339
BB-MTD-10W-AR	L1202*H339



Specification :

Model/ Power	Size
BB-MTD-5W-M	L110*W47*H583
BB-MTD-10W-M	L110*W47*H583




Specification :

Model/ Power	Size
BB-HJD-20W-Q	Ø110*262mm
BB-HJD-30W-Q	Ø110*262mm
BB-HJD-40W-Q	Ø110*262mm
BB-HJD-50W-Q	Ø110*297mm
BB-HJD-60W-Q	Ø110*297mm
BB-HJD-80W-Q	Ø150*375mm
BB-HJD-100W-Q	Ø150*375mm
BB-HJD-120W-Q	Ø150*375mm
BB-HJD-150W-Q	Ø150*375mm



Specification :

Model/ Power	Size
BB-HJD-80W-B	H2032x880mm
BB-HJD-100W-B	H2032x880mm
BB-HJD-120W-B	H2180x1200mm
BB-HJD-150W-B	H2180x1200mm

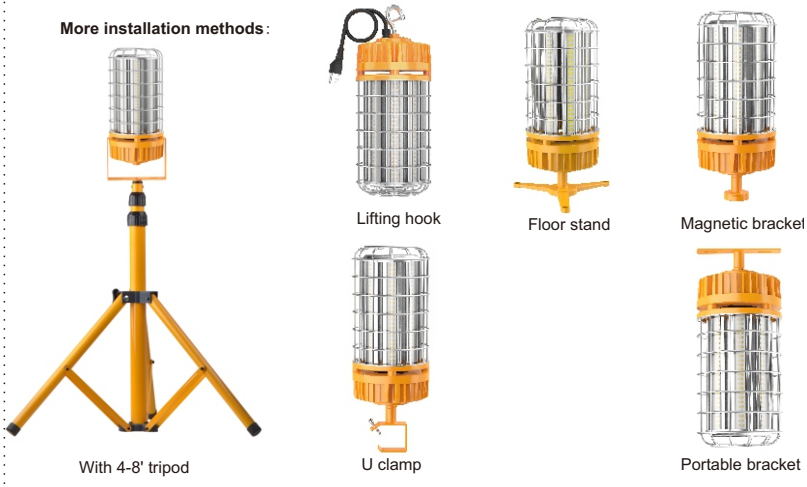

Specification :

Model/ Power	Size
BB-HJD-20W-Q2	Ø100x154mm
BB-HJD-100W-Q2	Ø100x154mm
BB-HJD-200W-Q2	Ø100x154mm

5 lights or 10 lights per string



Specification :

Model/ Power	Size
BB-HJD-300W-Q2	Ø110x297mm

5 lights or 10 lights per string



Specification :

Model/ Power	Size
BB-HJD-2X50W	H600(min)-3500(max)*W700




Specification :

Model/ Power	Size
BB-HJD-2X50W	H1813(min)-5500(max)*W1200

Key Features:

- Reliability: LED dock light is high impact resistant with appropriate structure design; with polyester powder coated surface; long time use in high and temperature and corrosive environment
- Safety: dust proof and water proof with tightening structure for the loading dock light
- Energy-saving: high efficient semiconductor light-emitting technology, Solar power, zero electricity
- Economy: long lifespan LED SMD; maintenance-free
- Convenience: U-tape bracket Mounting
- Uniqueness: providing excellent optical performance by adopting high reflecting, high transmittance focus lens
- Over 50000 hours lifetime and offer 5 years warranty

Product Diagram:

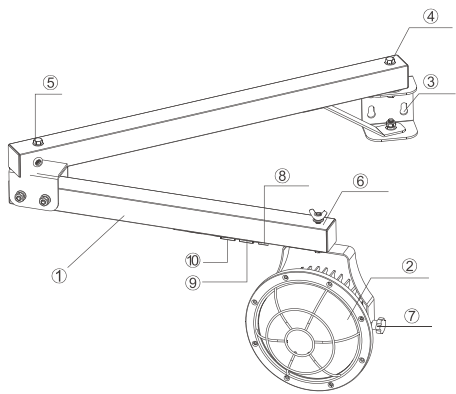

- ① Bracket
- ② LED Lmap
- ③ M8 screw hole × 4
- ④ 180° rotatable joint
- ⑤ 330° rotatable joint
- ⑥ ⑦ 360° rotatable joint
- ⑧ Switch
- ⑨ ⑩ Receptacle on bracket

Application:

- Factory Lighting.
- Dock Lighting.
- Warehouse Lighting.
- Goods shelf Lighting.
- Container Lighting.



